



Deep Groove Ball Bearing (SSiC)

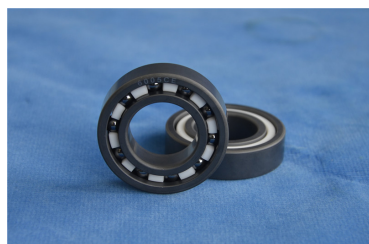

Открытый подшипник	Dimentions(мм)				Монтажные дименты (мм)			
Номер Тодзё	Боре д	О.Д Д	Ширина В	Chamfer R(min)	Да Мин	да Макс	Да макс	Ра Макс
683	3	7	2	0.1		/		
693	3	8	3	0.15		/		
603	3	9	3	0.15		/		
623	3	10	4	0.15		/		
633	3	13	5	0.15		/		
684	4	9	2.5	0.1	4.8	/	8.2	0.1
694	4	11	4	0.15	5.2	/	9.8	0.15
604	4	12	4	0.2	5.6	/	10.4	0.2
624	4	13	5	0.2	5.6	/	11.4	0.2
634	4	16	5	0.3	6	/	14	0.3
685	5	11	3	0.15	6.2	/	9.8	0.15
695	5	13	4	0.2	6.6	/	11.4	0.2
605	5	14	5	0.2	6.6	/	12.4	0.2
625	5	16	5	0.3	7	/	14	0.3
635	5	19	6	0.3	7	/	17	0.3
686	6	13	3.5	0.15	7.2	/	11.8	0.15
696	6	15	5	0.2	7.6	/	13.4	0.2
606	6	17	6	0.3	8	/	15	0.3
626	6	19	6	0.3	8	/	17	0.3

Deep Groove Ball Bearing (SSiC)

636	6	22	7	0.3	8	/	20	0.3
687	7	14	3.5	0.15	8.2	/	12.8	0.15
697	7	17	5	0.3	9	/	15	0.3
607	7	19	6	0.3	9	/	17	0.3
627	7	22	7	0.3	9	/	20	0.3
637	7	26	9	0.3	9	/	24	0.3
688	8	16	4	0.2	9.6	/	14.4	0.2
698	8	19	6	0.3	10	/	17	0.3
608	8	22	7	0.3	10	/	20	0.3
628	8	24	8	0.3	10	/	22	0.3
638	8	28	9	0.3	10	/	26	0.3